

## Features


- Die-cast aluminium heatsink
- High lumen efficacy @115Lm/W with PC diffuser
- 5m flex & plug
- 5m Stainless Steel cable for suspension installation

## Applications

Commercial, Industrial, Facilities,  
Warehouses, Centres

## Warranty

5 years

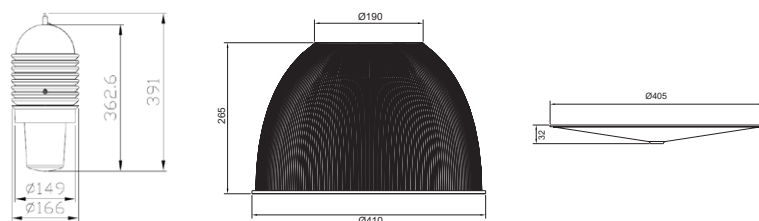

## Product Data

| Order Code | Wattage | CCT   | LUMENS | IP Rating | IK Rating | Beam Angle | Weight (kg) |
|------------|---------|-------|--------|-----------|-----------|------------|-------------|
| 333563     | 50W     | 3000K | 5750Lm | IP65      | IK08      | 90°*       | 3.25        |
| 333564     | 50W     | 4000K | 5750Lm | IP65      | IK08      | 90°*       | 3.25        |

[1] Operating temperature: -30°C~+50°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] \*Beam Angle measured with PC Diffuser only

## Necessary Accessories

| Item            | Order Code |
|-----------------|------------|
| 70° PC Diffuser | 333709     |

## Optional Accessories

| Item                  | Order Code |
|-----------------------|------------|
| 70° PC Diffuser Cover | 332038     |

