



# DESTINY PLUS

## BLACK LED EDGE-LIT PANEL

The Destiny Plus low UGR is a highly efficient low glare edge-lit panel.


Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result, it's also incredibly slim at only 13mm thin. It features a pre-wired flex and plug for quick and easy installation.

Featuring a CRI rating of  $Ra > 80$  and a MacAdams rating of  $SDCM < 3$ .

Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and a micro-prism diffuser.

## Features

- Super slim design
- Extruded aluminium frame
- Powder coated finish
- Prismatic diffuser
- Edge lit
- UGR<19

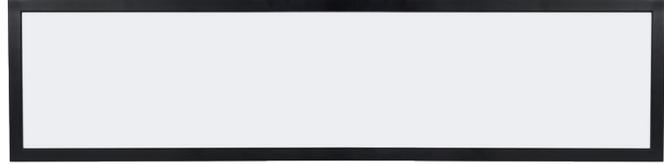



223354BK-ND

## Applications

Offices, Conference rooms  
Schools, Retail

## Warranty

5 years



### Product Data (With Non-Dim Driver 2231)

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Size (LxWxH)mm	Weight (kg)
223354BK	32W	4000K	3400Lm	90°	6A@ 300µs	1195*295*13	2.10

### Product Data (With Non-Dim Flicker Free Driver 2221)

Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Size (LxWxH)mm	Weight (kg)
24W/28W/32W/36W	4000K	2500/3000/3400/3800Lm	90°	38.8A@ 100µs	1195*295*13	2.10

### Product Data (With DALI Driver 2223)

Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Size (LxWxH)mm	Weight (kg)
20~35W	4000K	2100Lm~3700Lm	90°	11A@50µs	1195*295*13	2.10

### Product Data (With Triac Dim Driver 17001)

Wattage	CCT	Lumen Output	Beam Angle	Size (LxWxH)mm	Weight (kg)
27W	4000K	2860Lm	90°	1195*295*13	2.10

### Product Data (With 0-10V Dimmable Driver 17007)

Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Size (LxWxH)mm	Weight (kg)
34W	4000K	3600Lm	90°	17A@308µs	1195*295*13	2.10

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

Specifications are for reference only and may be changed without prior notice.