




SMART WiFi GARAGE DOOR CONTROLLER

Automate your garage door

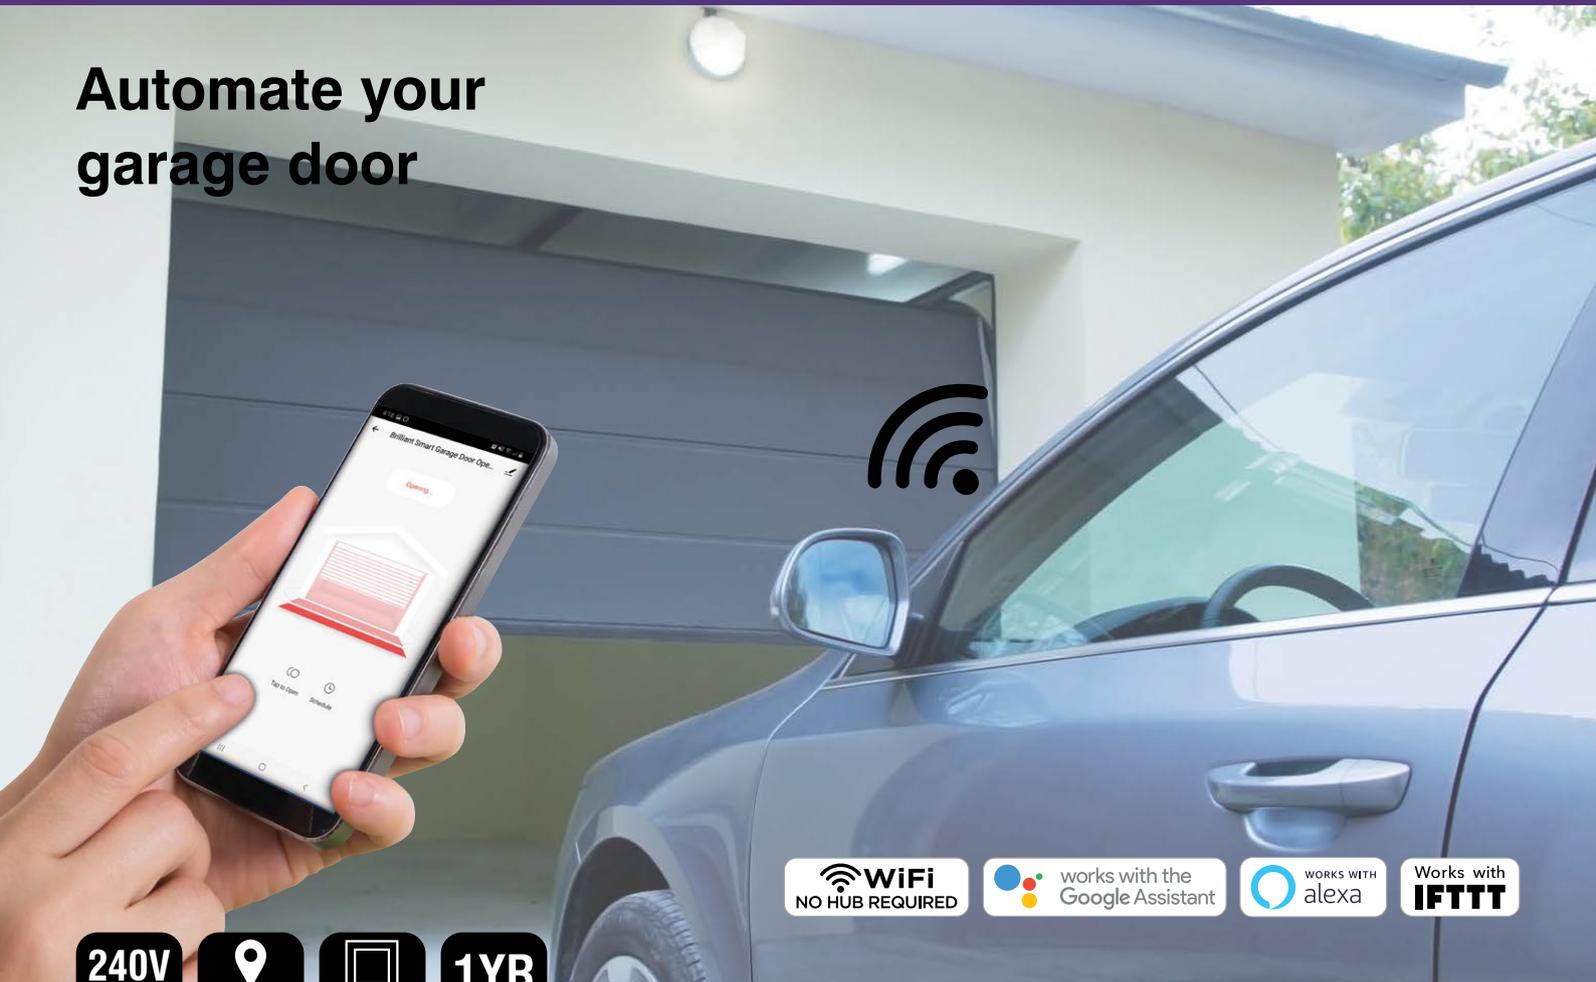

Open and close your motorised tilt or sectional garage door from anywhere. Feel more secure using geo-fencing to open your garage when you arrive home.

- Easily connected to your existing motorised garage door controller.
- Enable geo-fencing so your garage door opens automatically as you enter your street.
- Open and close your garage door from anywhere with your smartphone through the BrilliantSmart App.
- Receive alerts when your garage door opens or closes in real time.
- Easy-to-add functionality to upgrade your existing motorised garage door.
- Compatible with BrilliantSmart devices via automation & IFTTT.

When installing a smart door control, safety beams must also be installed as per the requirements of AS/NZS 60335.2.92 Amendment 2.

APPLICATIONS

- Open and close existing motorised tilt and sectional garage doors
- Create in app automation, to work with other BrilliantSmart products based on certain behaviours, ie: turn on exterior lights as your garage door opens.

Motor controller

Door gyro sensor





SMART WiFi GARAGE DOOR CONTROLLER

TECHNICAL SPECIFICATIONS

Operating voltage:	240V / 50Hz
Class:	Class II
Rated Current:	10A
Maximum Load:	2000W
Control Types:	Voice (using Google Assistant or Amazon Alexa) Remote (using Smart device) Geofence
Suitable for:	Sectional Garage Doors Tilt Garage Doors
Ingress protection:	Indoor use only
Kit includes:	1x Motor controller 1x Door Gyro sensor
Operating temperature:	+5°C to 35°C
Warranty:	1 year replacement
WiFi Info:	IEEE802.11b/g/n, 2.4GHz Mac Encryption; WEP/WAPI/TKIP/AES
Device Requirements:	iOS 8.0 or higher, Android 4.1 or higher
Standards:	AS/NZS 3105: 207+A1 AS/NZS 3112: 2017 with AS/NZS 3100: 2017+A1 AS/NZS 62368.1: 2018 <i>When installing a smart door control, safety beams must also be installed as per the requirements of AS/NZS 60335.2.92 Amendment 2.</i>


INSTALLATION

Recommended to be installed by licensed electrician


Please check that your existing door motor/controller has manual override terminals.

This may be found behind access panels on your existing garage door motor/controller. If you momentarily connect these two terminals together (with a wire) and it activates the door then this product will be compatible.

When installing a smart door control, safety beams must also be installed as per the requirements of AS/NZS 60335.2.92 Amendment 2.

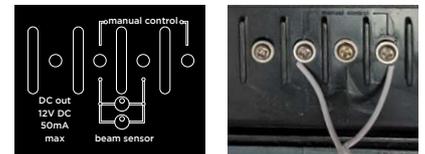

manual override terminals example

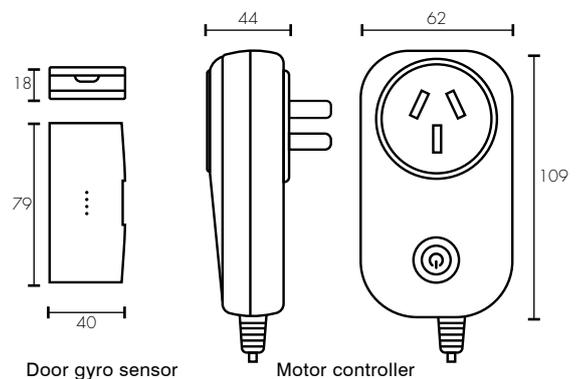

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	21456/05	White	Smart WiFi Garage Door Controller	W115 x H150 x D70 mm	0.27 kg	1 pc	9 312641 214564 >
OUTER CTN	21456/05	White	Smart WiFi Garage Door Controller	W442 x H360 x D330 mm	10.6 kg	36 pc	19312641214561