



TRILOGY CCT LED DOWNLIGHT



- 220-240V AC
- 8W 900lm
- TRI-COLOUR CCT
- 100° BEAM SPREAD
- DIMMING
- 90mm
- IC-F ABUTTED & COVERED
- IC-4
- 5YR WARRANTY

An 8W dimmable LED fixed downlight ideal for large projects. Its high lumen output of up to 900lm make it both energy efficient and bright, it is cost effective solution with outstanding performance.

- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4200K to natural light 5000K.
- Matt white housing with frost white diffuser
- Rebated design to reduce glare.
- IP44 rated - Front Fascia ONLY
- IC-F and IC-4 rated - Can be safely covered and abutted to building insulation.
- SAA approved with integrated dimmable driver.

APPLICATIONS

- Ideal for any residential or commercial interior space





TRILOGY CCT LED DOWNLIGHT

TECHNICAL SPECIFICATIONS

Operating voltage:	220-240V / 50Hz
Class:	Class II (2)
Wattage:	8W Total
Lumens:	780 Total lumens (3000K) 900 Total lumens (4000K) 880 Total lumens (5000K)
Colour temperature:	3000°K (Warm white) 4000°K (Cool white) 5000°K (Natural)
Beam angle:	100 degrees
Colour rendering index:	≥ 82
Power factor:	≥ 0.90
Dimmable:	Yes
Rated lifetime:	30,000hrs @25°C Ambient (When covered with thermal insulation)
Construction:	ABS, aluminium and PC Diffuser
Operating temperature:	TA: 25 degrees Celsius
Warranty:	5 year replacement
Standards:	AS/NZS 60598.1 AS/NZS 60598.2.2


INSTALLATION

Must be installed by a licensed electrician

ACCESSORIES

sold separately

Facia Ring	20429SP001/06 black 20429SP001/13 brushed chrome
-------------------	---

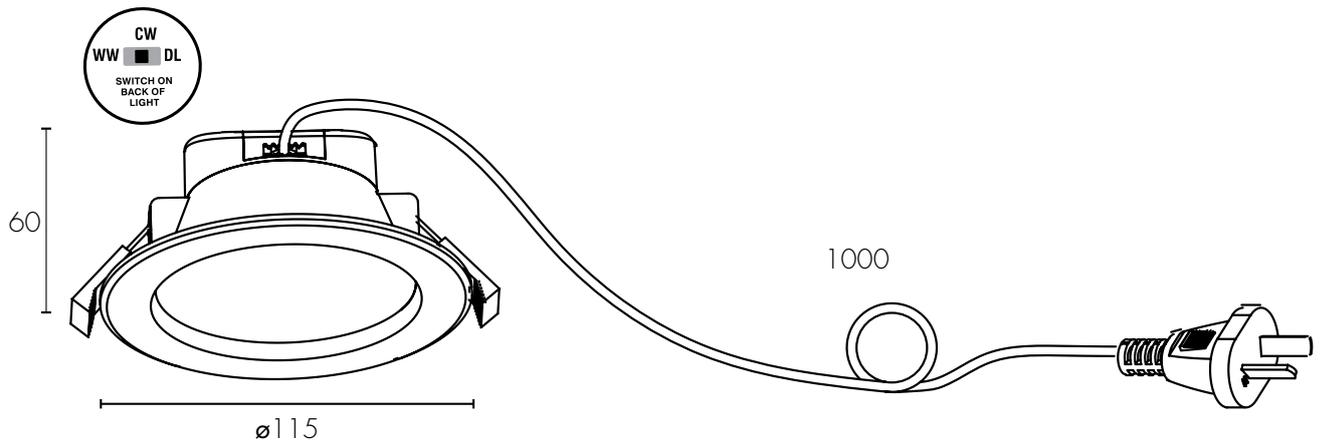

	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	20429/05	White	Trilog CCT LED Downlight	W119 x H75 x D119 mm	0.22 kg	1 pc	 9 312641 204299 >
OUTER CTN	20429/05	White	Trilog CCT LED Downlight	W395 x H260 x D265 mm	7.60 kg	20 pc	 19312641204296