


Ikuü Smart Wi-Fi Single 2-Way Switch



SSW01GX-WIFI

Key Features:


- WiFi (No hub required)
- LED indicators: Blue for On, white for Pairing
- Terminals fit up to 3 x 2.5mm² building cables
- Retrofit to standard mounting brackets and accessories
- 2-way switching compatible with standard switches or 2-way Mercator Ikuü switches
- Supports cabled two-way connection

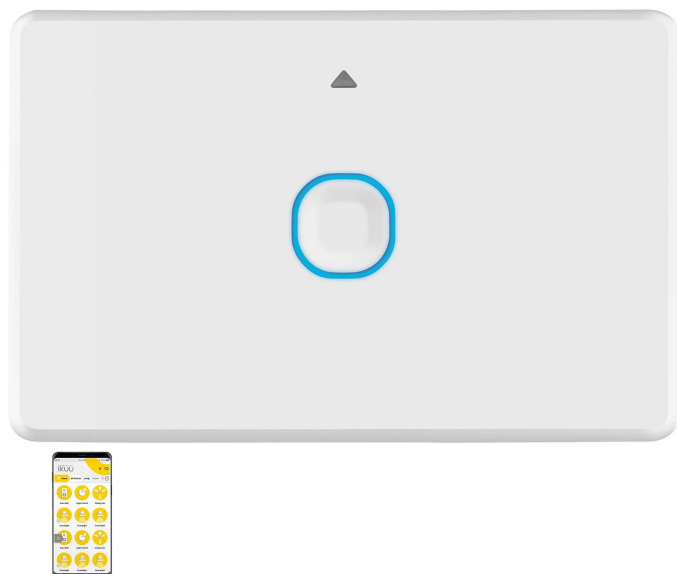


Compliance Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32, AZ/NZS 2772.2
Connectivity	Wi-Fi
Contact Material [Single Line Text Field]	Brass
Ip Rating	IP20
Material	Polycarbonate
Model	SSW01GX-WIFI
Operating Load	Resistive: 1000W (each gang), Incandescent (Halogen) : 1000W (each gang), LED: 400W (each gang)
Protocol	IEEE 802.11 b/g/n
Requirements	Existing 2.4GHz Wi-Fi network
Terminal Size [Single Line Text Field]	6mm ² (can fit up to 3 x 2.5mm ² wires per terminal)
Volt	250V
Warranty	3 years
Wireless Frequency	2.4GHz





One Clever App
 Easy, Seamless, Integrated
 Anywhere, anytime control
 Automate events
 Control device groups
 Schedule timers

works with


works with


IP20
 RATING



3
 YEAR
 WARRANTY

Dimensions

