

RAZORDM SERIES

Interior Surface Mounted LED Dimmable Tri-Colour Battens

Product Features:


- Input voltage: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- CCT changeable: 3000K/ 4000K/ 5000K
- LED chips: SMD2835
- Power factor: ≥0.9
- Ambient temp: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors



General Lighting




3 CCT in one fitting
CCT switch on the fitting

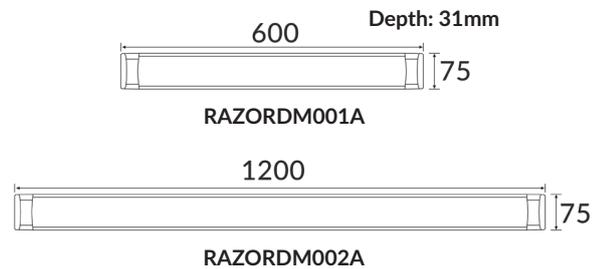

Tested & Recommended Dimmers:

Brand	Part No.	PCS per Dimmer
CLA - Trailing Edge	VELA, LYNX	RAZORDM001A: 1-10PCS RAZORDM002A: 1-6PCS
Diginet - LEDSmart	MMDM/BP, MMDM/RT	
Clipsal - Universal	32ELEDM, 32E45UDM, 32E450TM	
HPM	CAT400L, CAT400T	

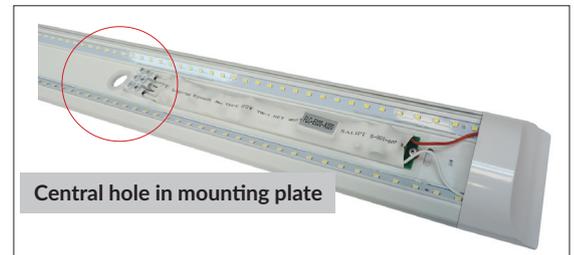

Part No.	Lumens			Watt	CRI	Dimensions	Weight	Box	Carton QTY
	3000K	4000K	5000K						
RAZORDM001A	1500lm	1700lm	1500lm	18W	>80	600x75x31mm	0.40kg	60.7x8x3.5cm	1/10
RAZORDM002A	3000lm	3400lm	3000lm	36W	>80	1200x75x31mm	0.75kg	121x8x3.5cm	1/10