


AMUN SERIES


Exterior LED Wall & Bollard Lights

- Input voltage range: 100-240V AC 50/60Hz
- Constant current driver included
- Material: double anti-corrosion powder coated high-pressure cast aluminium & anti aging UV protected PC diffuser
- Both front & back diffuser
- Comes with stainless steel screws
- LED chips: 2835 LED
- Power factor: >0.5
- CRI: >80
- Ambient temp: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- For bollard lights, to maintain the IP rating please use circular cable in junction
- For bollard lights, for parallel and single connection we recommend using an appropriate IP68 connector (CLA Connector: CONN001 & CONN002)

 30,000hr Lifetime	 120° Beam Angle	IP54 Rated	3YEAR Replacement Warranty
--	---	----------------------	---

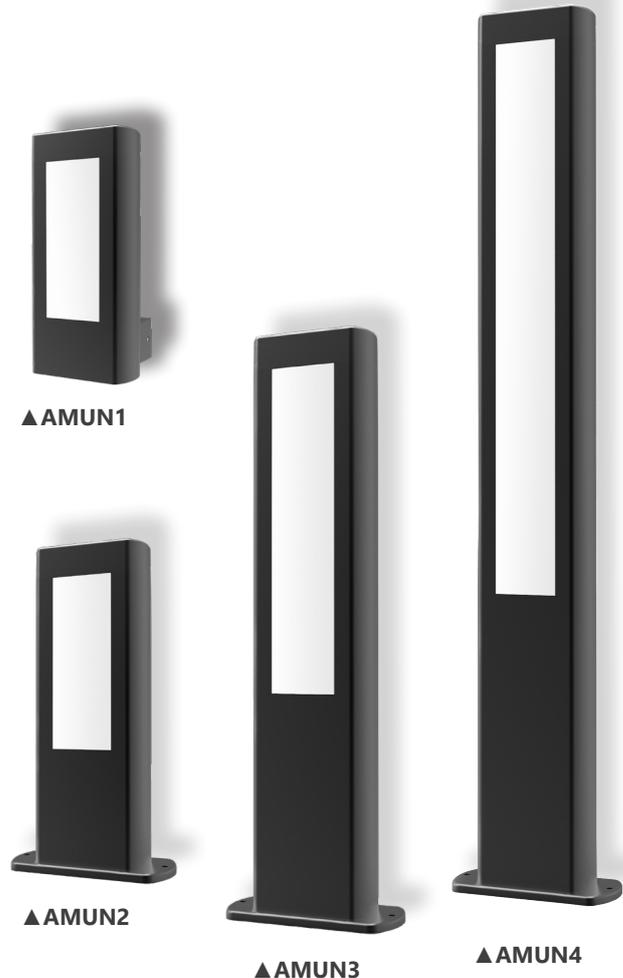

Exterior Lighting

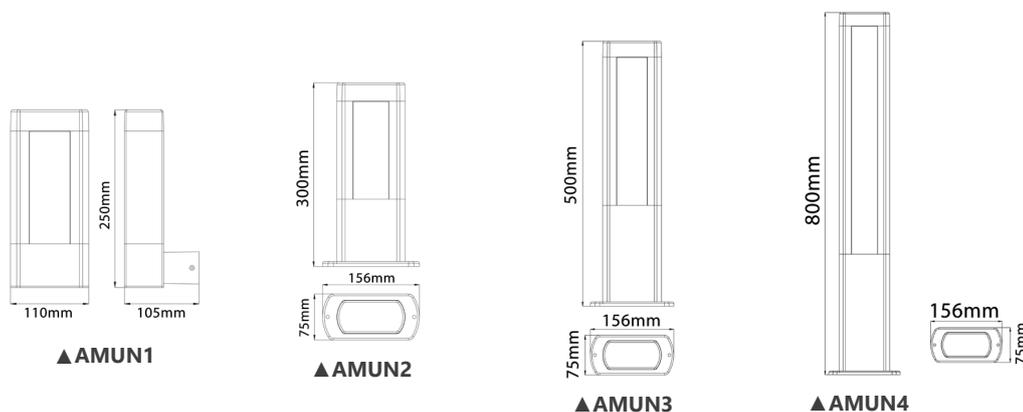

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT (W)	WEIGHT (KG)	BOX (CM)	CARTON QTY
AMUN1	WALL LED S/M Matt Black Rect 3000K	3000	560	10	1.15	26X12X12	1/6
AMUN2	BOLLARD LED Matt Black Rect Short H300mm	3000	560	10	1.25	31.5X17.3X8.6	1/8
AMUN3	BOLLARD LED Matt Black Rect Med H500mm	3000	645	12.5	1.85	51X17X8	1/4
AMUN4	BOLLARD LED Matt Black Rect Long H800mm	3000	756	12.5	2.7	81X17X9	1/4

*AMUN2-4 are not for use inground

*These bollards are designed for mounting on a solid surface such as a concrete path or sturdy timber decking

*To avoid disappointment and warranty problems, please ensure the IP rating of the chosen product is relevant for the intended use

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)