

APIS SERIES

Exterior LED Surface Mounted Up/Down Wall Lights




PRODUCT FEATURES

- Exterior LED surface mounted up/down wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Housing & heatsink: die cast aluminium
- Diffuser: PC
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors




APIS1

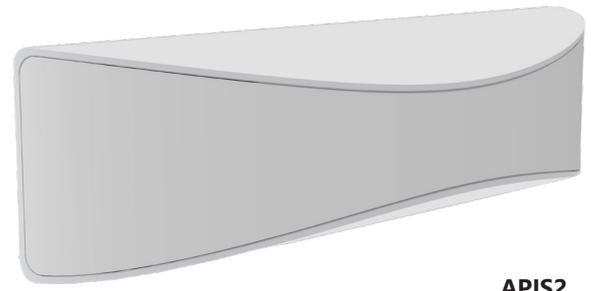

APIS2

| | | | |
|--|--|----------------------|---|
|  30,000hr Lifetime |  120° Beam Angle | IP65 Rated | 3YEAR Replacement Warranty |
|--|--|----------------------|---|

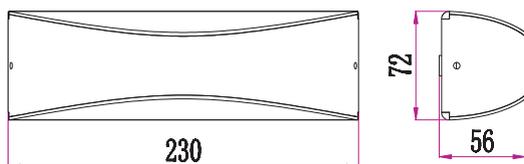

| PART NO. | DESCRIPTION | KELVIN (K) | LUMENS (LM) | WATT (W) | CRI | WEIGHT (KG) | BOX (CM) | CARTON QTY |
|----------|-------------------------------------|------------|-------------|----------|-----|-------------|------------|------------|
| APIS1 | WALL LED S/M Dark Grey Curved UP/Dn | 3000 | 275.75 | 10 | ≥80 | 0.5 | 24X8.7X7.2 | 1/8 |
| APIS2 | WALL LED S/M Matt WH Curved UP/Dn | 3000 | 275.75 | 10 | ≥80 | 0.5 | 24X8.7X7.2 | 1/8 |