




Globes - LED

## G4 BI-PIN LED GLOBES

- Input voltage: 12V DC constant voltage
- Runs off 12V DC battery or remote constant voltage LED driver
- Must be wired parallel
- Power factor: 0.9
- G4 base only
- Ambient temp: -30 to 40°C
- Max.distance to light source: 30m
- Not suitable for dimming

 G4	 30,000hr Lifetime	 3YEAR Replacement Warranty
---	---	---

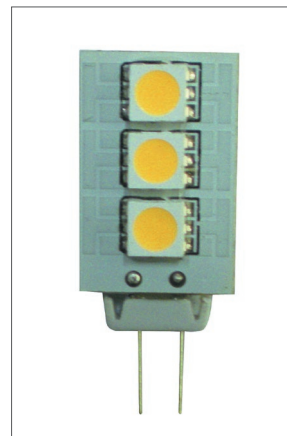

▲ CLAG4L3



▲ CLAG4L15

PART NO.	DESCRIPTION	BASE	KELVIN (K)	LUMENS (LM)	WATT (W)	BEAM ANGLE	CRI	LENGTH (mm)	DIAM (mm)	CARTON QTY
<b>CLAG4L15WW</b>	GLOBE LED 12V DC G4 1.5W	G4	2700	73	1.5	180°	66	38	Ø16	1/100
<b>CLAG4L15CW</b>	GLOBE LED 12V DC G4 1.5W	G4	5000	85	1.5	180°	66	38	Ø16	1/100
<b>CLAG4L3WW</b>	GLOBE LED 12V DC G4 0.9W	G4	3000	50	0.9	180°	60	33	15	1/100
<b>CLAG4L3CW</b>	GLOBE LED 12V DC G4 0.9W	G4	5000	60	0.9	120°	60	33	15	1/100