



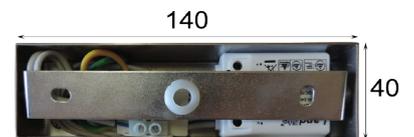

## NEW YORKG2

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Power factor: 0.5
- CRI:  $\geq 80$
- Material: Aluminium, Iron & Acrylic
- Ambient Temperature:  $-20$  to  $50^{\circ}\text{C}$
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

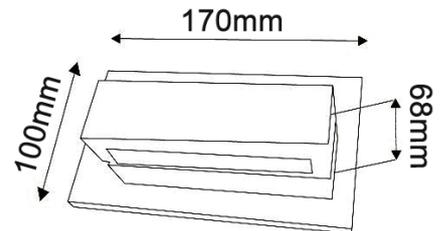

### Back Plate

Depth: 30mm

Mounting U bracket: 130x20mm

Central 7mm cable hole



PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
NEW YORKG2	3000	360	60	6	36pcs 2835	$\geq 80$	0.75	20x10x9.5	12