

**COPP1G
COPP151G
COPPSW1G**

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cougar Range of Single Power Points

- Switches approved to AS/NZS3133
- Socket outlets approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Also available in Black. Please check availability.
- Typical example of size seen below:

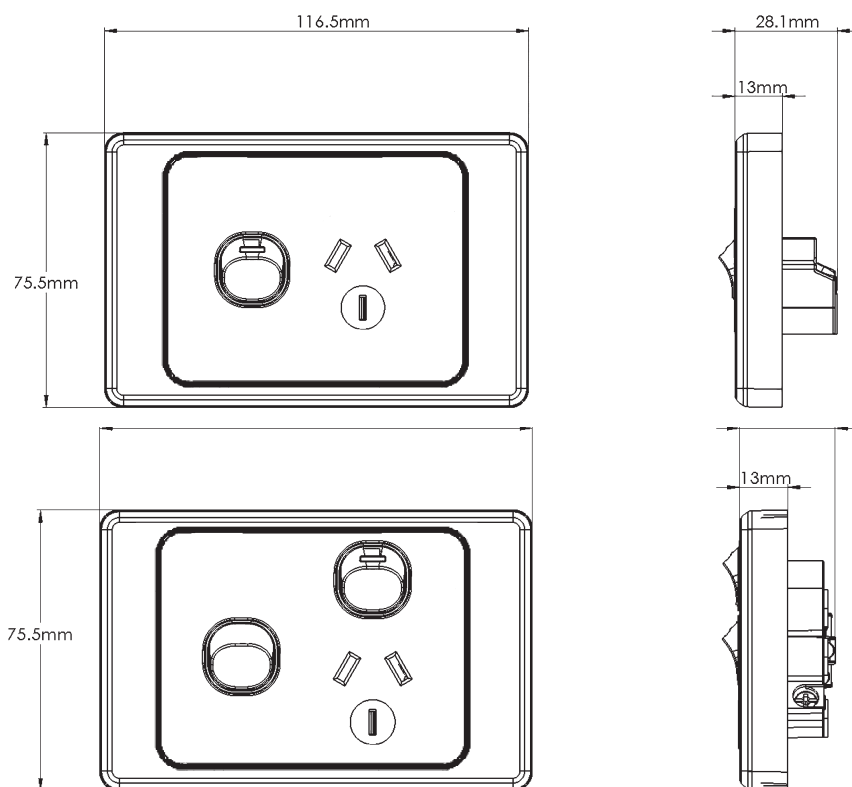

Catalogue Number	Description
COPP1G	Power Point Switched 1 Gang 10A 250V~
COPP151G	Power Point Switched 1 Gang 15A 250V~
COPPSW1G	Power Point Switched 1 Gang 10A 250V~ With Extra Switch 10AX/16A

When ordering BLACK product add "BK" at end of catalogue number, ie COPP1GBK

Certification Number:

COPP1G: GMA-509981-EA
COPP151G: GMA-509981-EA
COPPSW1G: GMA-501109-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au



**COPP2G
COPP152G
COPPSW2G
COPPV152G**

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cougar Range of Double Power Points

- Switches approved to AS/NZS3133
- Socket outlets approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Covers, plates and dummies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Also available in Black. Please check availability.
- COPP2G, COPP152G, COPPSW2G - also stocked in black - please check availability
- Typical example of size seen below:

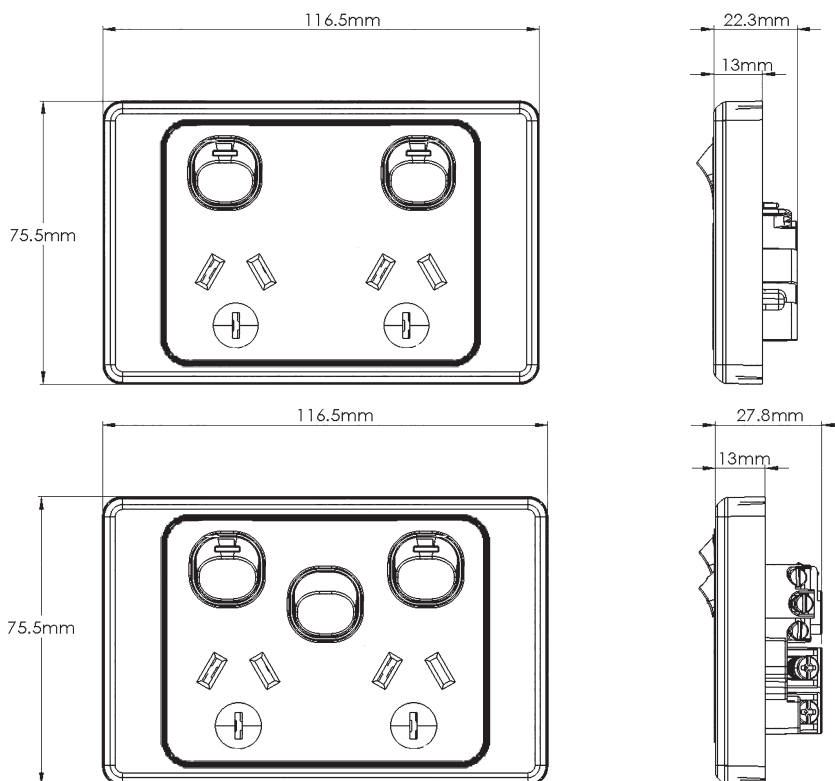

Catalogue Number	Description
COPP2G	Power Point Switched 2 Gang 10A 250V~
COPP152G	Power Point Switched 2 Gang 15A 250V~
COPPSW2G	Power Point Switched 2 Gang 10A 250V~ With Extra Switch 10AX/16A

When ordering BLACK product add "BK" at end of catalogue number, ie COPP2GBK

MEERKAT 

MEERKAT Switch Mechanisms are used for all switch plates. Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number:

COPP2G: GMA-508660-EA
COPPSW2G: GMA-50120-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
221212

Vertical Switches

COSWV1G
COSWV2G
COSWV3G
COSWV4G
COSWV5G
COSWV6G

Horizontal Switches

COSW1G
COSW2G
COSW3G
COSW4G
COSW5G
COSW6G

Switch Plates (Less Mechs)

COSWPV1G
COSWPV2G
COSWPV3G
COSWPV4G
COSWPV5G
COSWPV6G
COSWPVXG

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cougar Range of Switch Plates


- Switches are rated 10AX/16A 250V~ and approved to AS/NZS3133
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling - Switches are two way with looping terminal and suit 3 x 1.5mm² cabling - 4.1mm terminal bores
- Combination head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- The clip in switch mechanism is able to be used and clip into other Trader and competitor switch plate ranges
- Motor rating M100
- Standard colour is white. Black is also available. Please check availability
- Plates suit Trader Meerkat MESW mechs, including TV and Data; and Clipsal 30 Style* mechs and accessories
- Typical example of size seen in diagram:



Example of cover plate only / grid and plate only (less mech)



Example of cover plate with MERJ6CM data mech installed

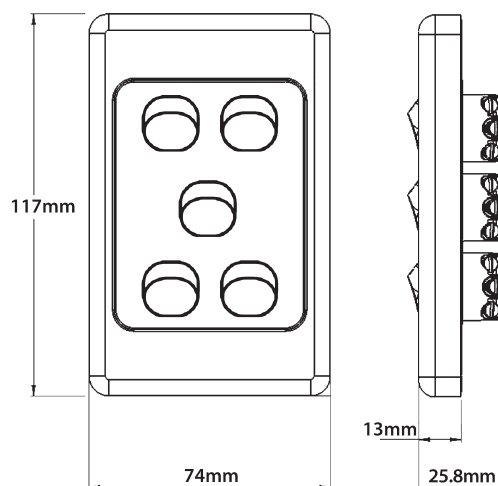

Catalogue No.	Description
COSWV1G	Switch Vertical 1 Gang, 10AX/16A 250V~
COSWV2G	Switch Vertical 2 Gang, 10AX/16A 250V~
COSWV3G	Switch Vertical 3 Gang, 10AX/16A 250V~
COSWV4G	Switch Vertical 4 Gang, 10AX/16A 250V~
COSWV5G	Switch Vertical 5 Gang, 10AX/16A 250V~
COSWV6G	Switch Vertical 6 Gang, 10AX/16A 250V~
COSW1G	Switch Horizontal 1 Gang, 10AX/16A 250V~
COSW2G	Switch Horizontal 2 Gang, 10AX/16A 250V~
COSW3G	Switch Horizontal 3 Gang, 10AX/16A 250V~
COSW4G	Switch Horizontal 4 Gang, 10AX/16A 250V~
COSW5G	Switch Horizontal 5 Gang, 10AX/16A 250V~
COSW6G	Switch Horizontal 6 Gang, 10AX/16A 250V~

Catalogue No.	Description
COSWPV1G	Switch Plate Vertical 1 Gang (Less Mech)
COSWPV2G	Switch Plate Vertical 2 Gang (Less Mech)
COSWPV3G	Switch Plate Vertical 3 Gang (Less Mech)
COSWPV4G	Switch Plate Vertical 4 Gang (Less Mech)
COSWPV5G	Switch Plate Vertical 5 Gang (Less Mech)
COSWPV6G	Switch Plate Vertical 6 Gang (Less Mech)
COSWPVXG	Blank plate with clip on surround

The above catalogue numbers where "P" appears in number, refers to Cover Plate Only / Grid and Plate only (less mech)

* The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd.

GSM Electrical (Australia) Pty Ltd, the TRADER brand and its products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

When ordering BLACK product add "BK" at end of catalogue number, ie COSW1GBK

MEERKAT 

MEERKAT Switch Mechanisms are used for all switch plates. Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number:
COSWV1G-COSWV6G: GMA-508434-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
221212

COPP2USB2G
COPP2USB2GBK
COPP2USB2GAC
COPP2USB2GBK

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


Do not wash the cover plates in water over 60°C.



Cougar Range of USBs


COPP2USB2G

- USB outlet approved to AS/NZS 60950.1
- Electrical power point approved to AS/NZS 3112
- The rating for the USB is 3.4A at 5V when one device is inserted, then it divides the output when both USB ports are in use.
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable
- Standard colour is white. Black also stocked - please check availability

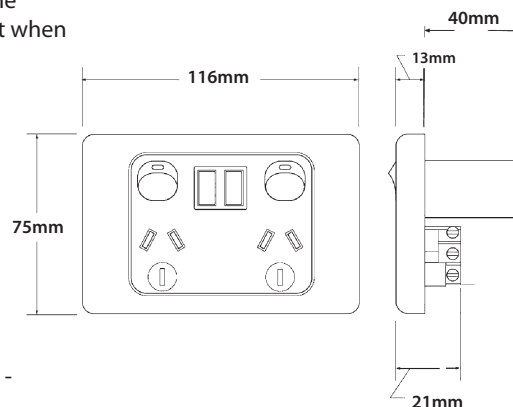

COPP2USB2GAC

- Suitable for USB Type C applications up to 3 Amp at 5V.
- Ideal for phones that utilise USB Type C connections.
- Not suitable for laptops or other devices requiring greater output than 3 Amp at 5V.
- USB outlet approved to AS/NZS 60950.1
- Electrical power point approved to AS/NZS 3112
- The rating for the USB is 3.4A at 5V when one device is inserted, then it divides the output when both USB ports are in use.
- Fits standard wall boxes and mounting accessories
- Full cover plate
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black also stocked - please check availability

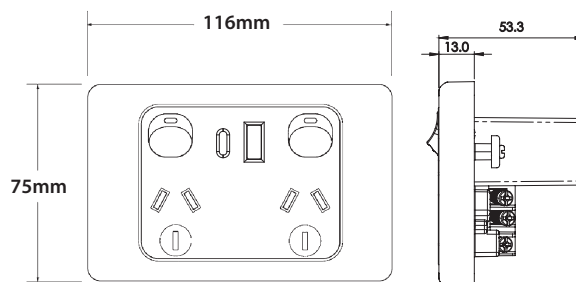

Catalogue Number	Description
COPP2USB2G	Fully Integrated Dual USB Charger Power Point
COPP2USB2GBK	Fully Integrated Dual USB Charger Power Point, Black
COPP2USB2GAC	Fully Integrated Dual USB Charger Power Point (Type A & C)
COPP2USB2GACBK	Fully Integrated Dual USB Charger Power Point (Type A & C)

Certification Numbers:

COPP2USB2G: GMA-508273-EA

COPP2USB2GAC: TBC

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



COUSB2G COUSB4G

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


Do not wash the cover plates in water over 60°C.



Cougar Range of USB's


COUSB2G

- USB outlet approved to AS/NZS 60950.1
- The rating for the USB is 3.4A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket
- USB power supply contains temperature cut out and overload protection
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white

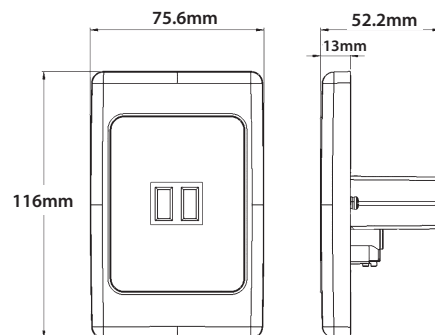

COUSB4G

- USB outlet approved to AS/NZS 60950.1
- The rating for the USB is 2 x 3.1A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket - 3.1A available across 2 USB outlets on the left and 3.1A available across 2 USB outlets on the right
- USB power supply contains temperature cut out and overload protection
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white

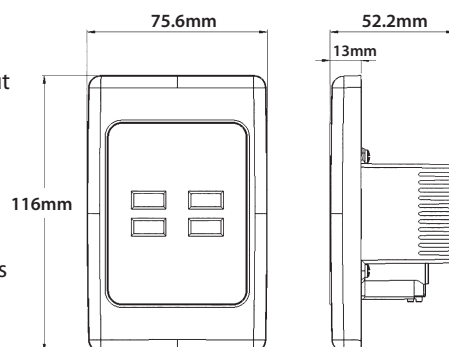

Catalogue Number	Description
COUSB2G	USB Charger Plate, 3.4A Dual Fully Integrated 5V 1.7A/3.4A
COUSB4G	USB Charger Plate, 3.4A Quad Fully Integrated 5V 2 X 1.55A/3.1A

Certification Numbers:

COUSB2G: GMA-508370-EA
COUSB4G: GMA-508370-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



COSWVA1G
COSWVA2G
COSWVA3G
COSWVA4G

*See current catalogue for further detail

Page 1 of 2

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cougar Range of Architrave Switch Plates

- Switches are rated 10AX/16A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white.
- Approved to AS/NZS3133
- Typical example of size seen below:

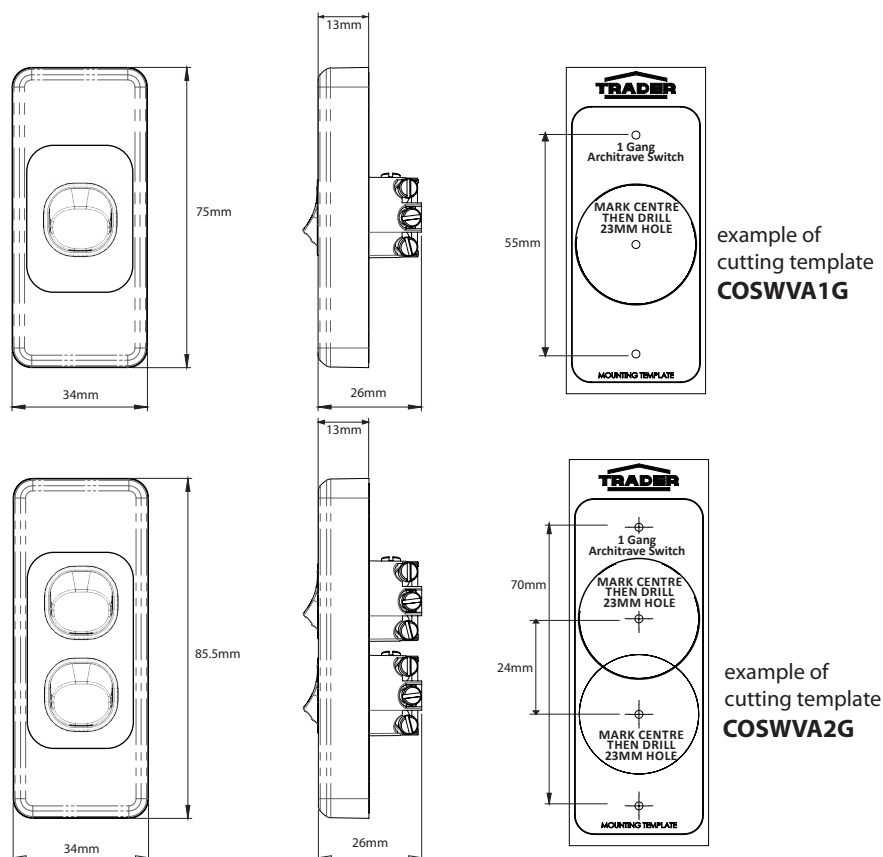

Catalogue Number	Description
COSWVA1G	Switch Vertical Architrave 1 Gang, 10AX/16A 250V~
COSWVA2G	Switch Vertical Architrave 2 Gang, 10AX/16A 250V~
COSWVA3G	Switch Vertical Architrave 4 Gang, 10AX/16A 250V~
COSWVA4G	Switch Vertical Architrave 4 Gang, 10AX/16A 250V~

MEERKAT 

MEERKAT Switch Mechanisms are used for all switch plates.
Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number:
GMA-508434-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
221212

COSWVA1G
COSWVA2G
COSWVA3G
COSWVA4G

*See current catalogue for further detail

Page 2 of 2

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.



Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Do not wash the cover plates in water over 60°C.



Cougar Range of Architrave Switch Plates

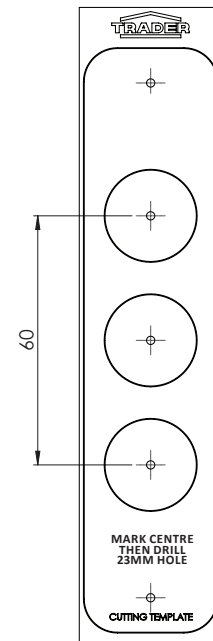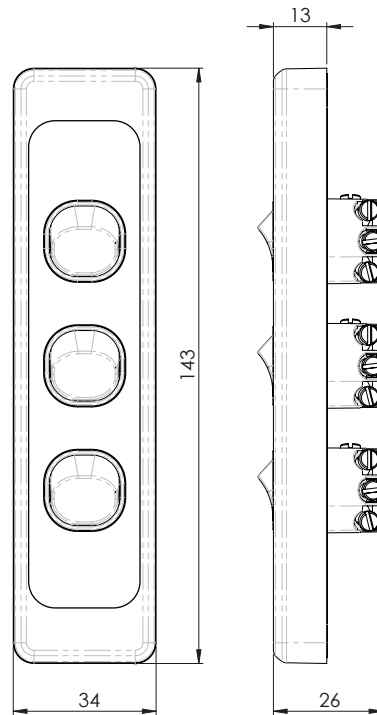

example of
cutting template
COSWVA3G

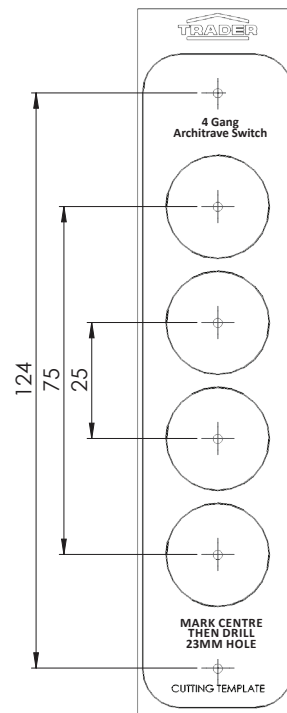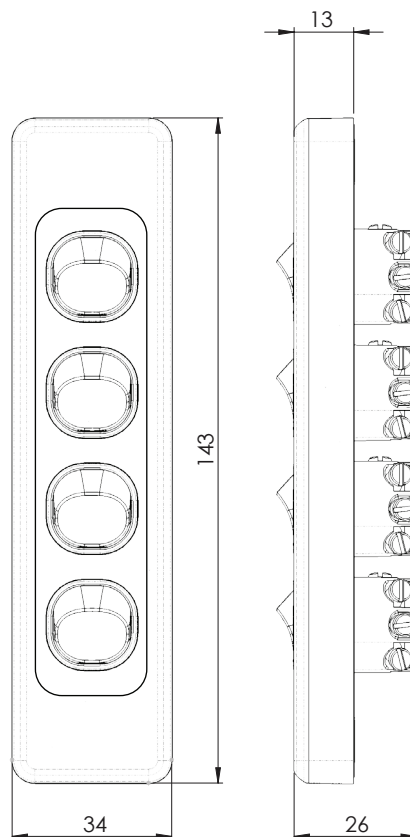

example of
cutting template
COSWVA4G

Certification Number:
GMA-508434-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



COSWDPOV45 COSWDPOV45H

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


Do not wash the cover plates in water over 60°C.



Cougar Oven Switches

COSWDPOV45 / COSWDPOV45H

- Switch approved to AS/NZS60669.1
- 45A 250V~, Double Pole
- Terminal bore 6.5mm diameter suits 16mm² cable
- Cover, plate and dolly is made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white.

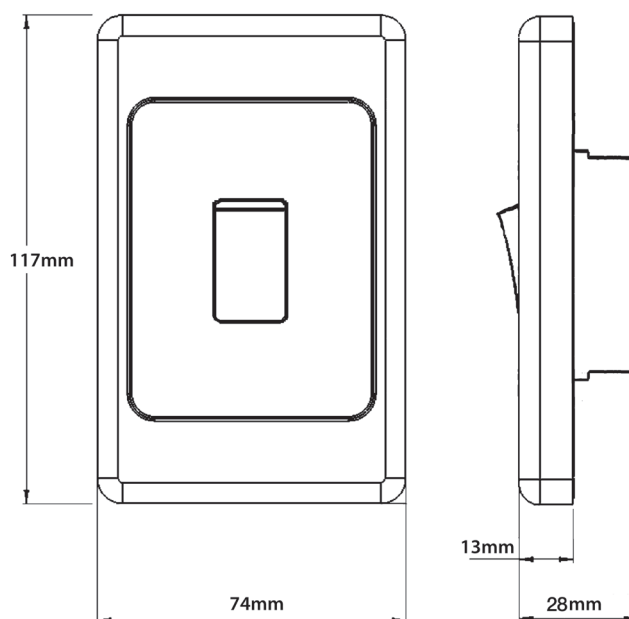

Catalogue Number	Description
COSWDPOV45	Switch Oven, 45A 250V~ Double Pole
COSWDPOV45H	Switch Oven, 45A 250V~ Double Pole - Horizontal

Certification Number:
COSWDPOV45 / COSWDPOV45H: GMA-502679

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
221212

**COBRUSH
CODEN
CODENBK**

*See current catalogue for further detail



COBRUSH



CODEN



CODENBK

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

Cougar COBRUSH & CODEN


COBRUSH (Brush Cable Management Flush Plate)

CODEN (Brush Cable Management Recessed Plate)

- Excellent dust sealing solutions for telecommunications and data cabling applications
- They are ideal for positioning behind wall mounted television, home theatre and component systems
- The cabling remains neat and tidy with a minimum visually exposed out of the wall cavity, with the large openings allowing multiple cables to be accommodated at once
- Standard colour is white. CODEN also available in Black (CODENBK)




COBRUSH

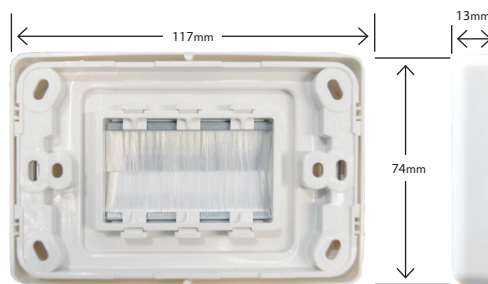

COBRUSH (REAR VIEW)




CODEN

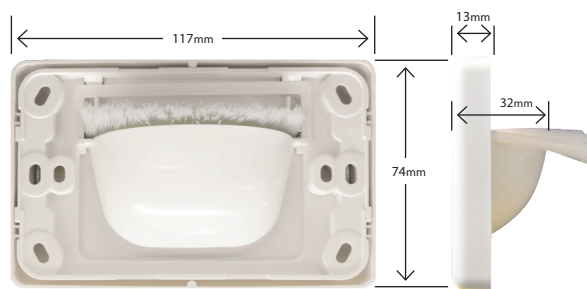

CODEN (REAR VIEW)

Catalogue Number	Description
COBRUSH	Brush Cable Management Flush Plate
CODEN	Brush Cable Management Recessed Plate
CODENBK	Brush Cable Management Recessed Plate, Black

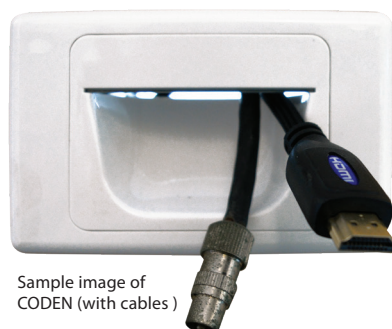

Sample image of CODEN (with cables)

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
221212

COSHELF

**For use with:
All Cougar2
Sockets**

Also suitable for use with
Clipsal 2000 Series*

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cougar Power Point & USB Shelf

- Suitable for use with all "Cougar 2" style plates
- Includes screws and screw caps for secure retention on wall
- No need to remove wall plates from wall for installation of the shelf
- Also suitable for use with Clipsal 2000 Series*



Examples of the Cougar Shelf in use with COPP2G

Examples of the Cougar Shelf in use with COPP2USB2G



Examples of the Cougar Shelf in use

Includes screws and screw caps



*All similar products are Clipsal references and Clipsal is the Trademark of Schneider Electric Pty Ltd.

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
221212

**COSMKXG
COSMKXGBK**

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Cougar Surface Mount Kit

- Designed to make mounting easier on hard surfaces where drilling out or depth is a problem.
- The COSMKXG is able to fit all the various models in the Cougar range and allow them to mount up from the surface.
- The deep cover that sits over the product and mounting flange provides an aesthetically pleasing professional finish.
- 84mm mounting centres
- Made from UV stabilised polycarbonate to avoid discolouring to yellow
- Overall dimensions (length 117mm x width 77mm x depth 27mm)
- Provided with two short mounting screws.
- Standard colour is white. Black also stocked
- please check availability

