


MAX-50-SM 1M LED Profile




Description

The Max-50 Surface mounted profile is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and Osram Led boards. The system offers many additional options such as Dali dimming and emergency upon request.

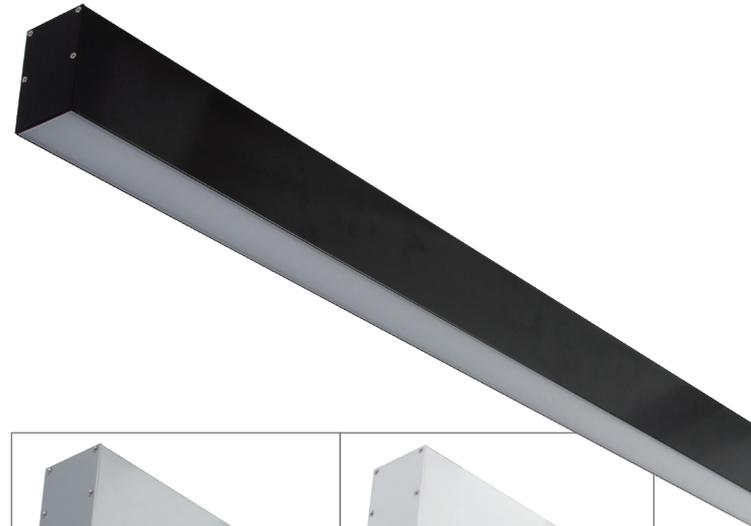

Specification Features

Input Voltage:	240V
Power (W):	17.3W/Per Metre
IP rating (IP):	20
Lumens (lm):	Warm White 3000K - 2466lm Neutral White 4000K - 2600lm
LED type:	Osram LED Boards
CCT:	3000K - 4000K
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs
Installation:	Ceiling Mounted
Material:	Extruded 6063 aluminium
Finish:	Clear anodised, black or white powder coat finish
Diffuser:	Flat high output opal-frost
Length:	Sold per metre*
Size (mm)	Profile (W) 50mm x (H) 75mm
Available Upon Request:	<ul style="list-style-type: none"> High Output LED Boards Intergrated Emergency

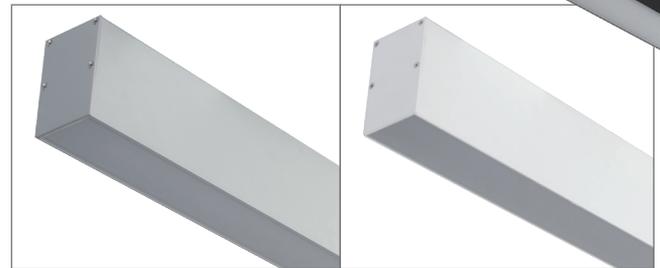


Aluminium Finish

White Finish

Note: This product is made to order and may have a lead time.
 * Profile can be cut to any length required.
 ** Dali and 0-10V dimming available upon request

Diagrams / Additional

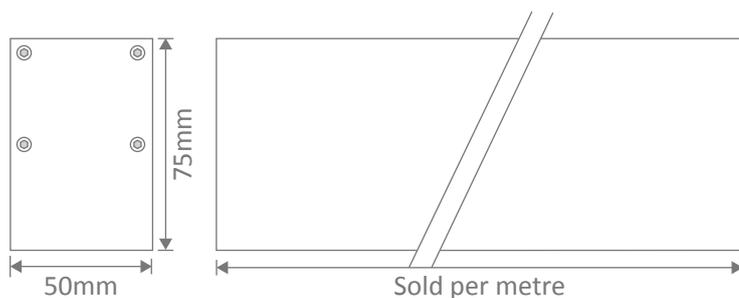

Item No.	Variant			CCT
	Blk	Wht	Alu	
MAX-50-SM	22316	22320	22312	3000K
	22317	22321	22313	4000K
	Dali			
	22566	22570	22562	3000K
	22567	22571	22563	4000K
	22905	22906	22904	Tunable White
	0-10V			
	22568	22572	22564	3000K
	22569	22573	22565	4000K