

MAX-75-REC 1M LED Recessed Profile



Description

The MAX-75 Recessed profile is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and Osram Led boards. The system offers many additional options such as Dali dimming and emergency upon request.



Specification Features

Input Voltage:	240V
Power (W):	17.3W/Per Metre
IP rating (IP):	20
Lumens (lm):	Warm White 3000K - 2466lm
LED type:	Neutral White 4000K - 2600lm
CCT:	3000K - 4000K
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs
Installation:	Recessed
Material:	Extruded 6063 aluminium
Finish:	Clear anodised, black or white powder coat finish
Diffuser:	Flat high output opal-frost
Length:	Sold per metre*
Size (mm)	Profile (W) 75mm x (H) 75mm
Available Upon Request:	<ul style="list-style-type: none"> High Output LED Boards Intergrated Emergency

Note: This product is made to order and may have a lead time.

* Profile can be cut to any length required.

** Dali and 0-10V dimming available upon request



Aluminium Finish




White Finish



Back View

Diagrams / Additional

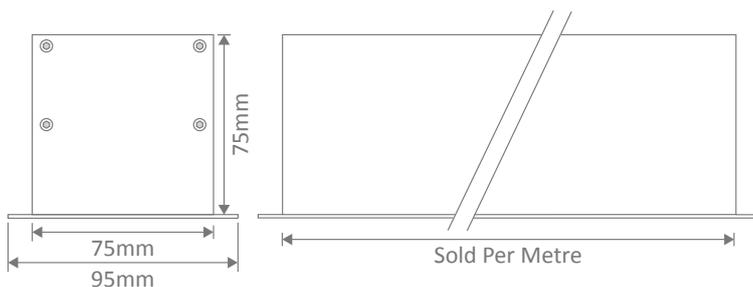

Item No.	Variant			CCT
	Blk	Wht	Alu	
MAX-75-REC	22352	22356	22348	3000K
	22353	22357	22349	4000K
	Dali			
	22602	22606	22598	3000K
	22603	22607	22599	4000K
	22914	22915	22913	Tunable White
	0-10V			
	22604	22608	22600	3000K
	22605	22609	22601	4000K