

Installation Manual

ZAC-4-12V-SQR


Date: 02/2020

Variant	Item No.	Description
19778	ZAC-4-12V-SQR-BLK-WW	LED recessed wall light, black finish. 3000K, warm white.
19779	ZAC-4-12V-SQR-BLK-W	LED recessed wall light, black finish. 5000K, white.
19780	ZAC-4-12V-SQR-DGR-WW	LED recessed wall light, dark grey finish. 3000K, warm white.
19781	ZAC-4-12V-SQR-DGR-W	LED recessed wall light, dark grey finish. 5000K, white.
19782	ZAC-4-12V-SQR-SLR-WW	LED recessed wall light, silver finish. 3000K, warm white.
19783	ZAC-4-12V-SQR-SLR-W	LED recessed wall light, silver finish. 5000K, white.
19784	ZAC-4-12V-SQR-WHT-WW	LED recessed wall light, white finish. 3000K, warm white.
19785	ZAC-4-12V-SQR-WHT-W	LED recessed wall light, white finish. 5000K, white.

Thank you for purchasing your new LED ZAC-4-12V-SQR, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

Voltage:	12V DC	Lumen (±5%):	Warm White 3000K - 200lm White 5000K - 250lm	Dimmable:	No
Power:	4W	Beam Angle:	30°	Operating Temp:	-20°~45°
IP Rating:	IP65	CCT:	3000K - 5000K	Requires:	12V DC Constant Voltage LED Driver
CRI:	≥80	Lifespan:	50,000hrs		

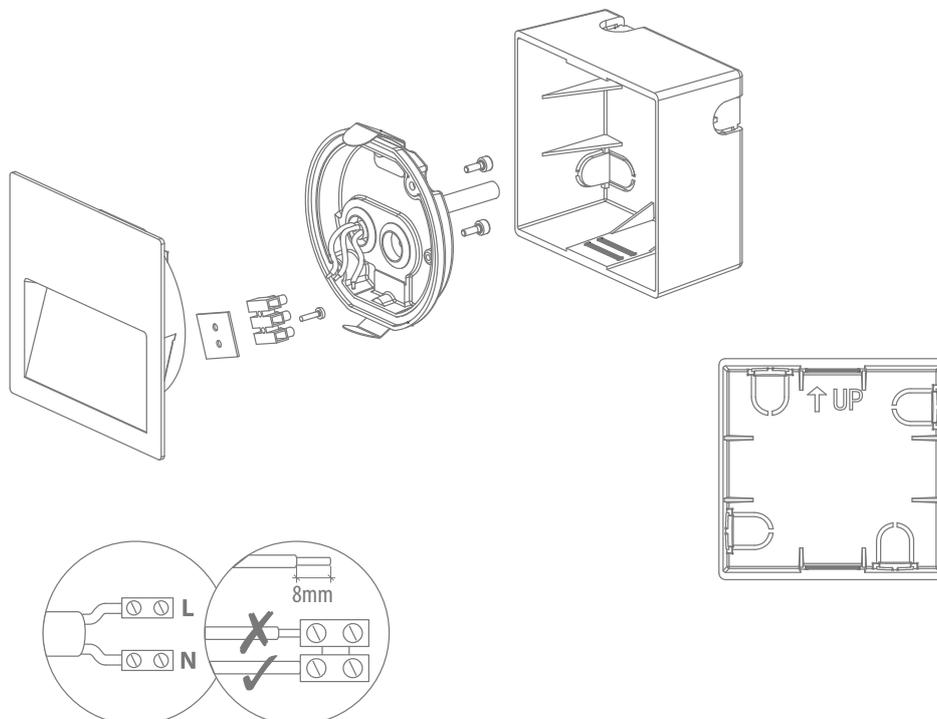

Cutout without recessed box: (L) 100mm x (W) 100mm

Cutout with recessed box: (L) 110mm x (W) 110mm

Note: The fitting must be wired in parallel

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas