
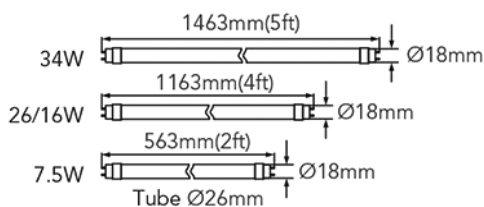


Features

- High lumen efficiency up to 150Lm/W
- Compatible with main supply
- Alternative to T5 fluorescent
- Fully integrated flicker free driver
- Opal glass diffuser
- Fixed G5 cap
- Single end power input SAA Certified
- 2A fuse included

Applications

- Retail, offices, stations, garages, car parks, industrial, commercial



Products Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Lifetime
363044	7.5W	4000K	1100lm	230°	50000h
363054	16W	4000K	2400lm	230°	50000h
363055	16W	5000K	2400lm	230°	50000h
363064	26W	4000K	3900Lm	230°	50000h
363065	26W	5000K	3900Lm	230°	50000h
363034	34W	4000K	5100lm	230°	50000h

[1] Voltage: 220~240V

[2] Operating Frequency: 50/60Hz

[3] Operating Temperature: -25°C to +45°C

Note: Other CCT can be made to order, MOQ is required