


Features

- Versatile colour temperature and brightness selections with Tri-colour and multi-watt technology to effortlessly fine-tune your lighting experience
- Experience exceptional illumination with high efficacy, achieving up to 140Lm/W
- Polycarbonate Tube suitable for areas where food preparation is required
- Flicker-free to enhances visual comfort and reduces eye strain
- Built in driver meaning no need for ballast
- Includes 2A Fuse



Applications

- Retail, commercial, hospitality, carpark, supermarket, garage and education

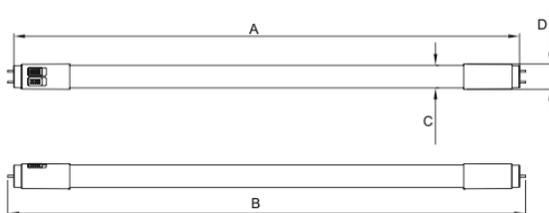

Products Data

Order Code	Wattage	CCT	Lumen Output	Size(LxD)mm	Lifetime(Hours)
151001	9/7/5W	3/4/6.5K	700/980/1260Lm	602mmx26mm	50000
151002	20/16/12W	3/4/6.5K	1680/2240/2680Lm	1212mmx26mm	50000
151003	27/20/15W	3/4/6.5K	2100/2800/3780Lm	1512mmx26mm	50000

[1] Voltage: 220~240V

[2] Operating Frequency: 50/60Hz

[3] Operating Temperature: -25°C to +45°C