




## Features

- DC24V Tube
- Energy efficient alternative to 36W T8 fluorescent tubes
- High efficiency SMD LED chips
- High transparency opal PC diffuser
- Rotary G13 cap

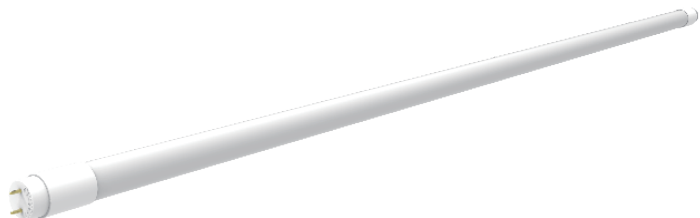

## Applications

Retail, Offices, Stations, Garages and car parks  
Industrial, Commercial



## Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	PF	Size (DxL)mm	Weight (kg)
842403	18W	4000K	1800Lm	125°	0.9	28.6*1213	0.22
842404	22W	4000K	2200Lm	125°	0.9	28.6*1514	0.22

[1] Voltage: DC24V

[2] Operating Frequency = 50Hz;

[3] Operating Temperature: -20 °C ~+45 °C