

Elevate Your Outdoor  
Lighting Experience

# Roma Bollard

## Tri-Colour Multi-Watt Selectable

A leading choice in the realm of customizable, high-performance LED bollard lighting.

3K

4K

5K

**Tailored Illumination:** Empower your lighting strategy with our cutting-edge colour and wattage selection technology. Customize the LED light output and colour temperature to precisely align with the unique requirements of your project. Your vision, your lighting solution.

**Exceptional Durability:** Roma Bollard showcases a robust die-cast aluminium head and base, and extruded aluminium body, ensuring longevity and resilience against the harshest environmental conditions. With an impressive IP66 rating, it excels in outdoor applications.

**Versatile Capabilities:** Roma Bollard offers an array of features designed to cater to your needs, with adjustable tri-colour and multi-watt and remarkable efficacy, delivering up to 140Lm/W.

Roma Bollard emerges as your versatile, enduring and customizable lighting solution, an ideal choice for enhancing the aesthetics and security of your outdoor spaces.

**Illuminate your surroundings with the sophistication of Roma Bollard today!**

### Features

- Versatile colour and brightness control with Tri-colour and multi-watt technology to effortlessly fine-tune your lighting experience
- Experience exceptional illumination with high efficacy, achieving up to 140Lm/W
- Polycarbonate lens with die-cast aluminium head and base, and extruded aluminium body
- Impressive IP66 rating for unmatched water and dust resistance.
- IK10 offers robust protection against impact
- Extended lifespan exceeding 50,000 hours, ensuring longevity and reliability

### Dimming Options



- DALI Option – MTO

### Includes

- Rag-bolt assembly

### Applications

- Pathways, walkways, area lighting, security, entryways, perimeter lighting, landscaping

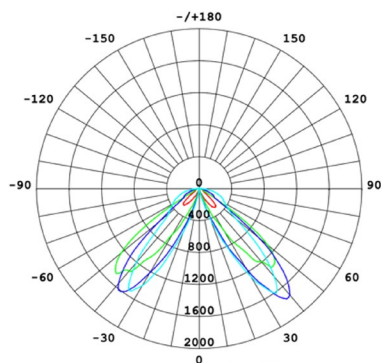

### Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	PF	Lifetime L70B50
491000	12W/ 16W/ 22W	3000K/4000K/5000K	1680/2240/3080Lm	Type 5	0.9	50000h

Note: Voltage 220-240V. Operating Temperature: -30 °C~+45 °C. Operating Frequency=50/60Hz.