

Installation Manual

ASTRA TRIO

Thank you for purchasing your new LED ASTRA TRIO, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

| | | | | | |
|----------|--------|--------------|--|-----------|-----------|
| Voltage: | 12V DC | Lumen (±5%): | Warm White 3000K - 200lm Neutral White 4000K - 230lm White 5000K - 205lm | Dimmable: | Yes |
| Power: | 3.6W | Beam Angle: | 110° | Lifespan: | 50,000hrs |
| CRI: | ≥80 | CCT: | 3000K - 4000K- 5000K | | |


Attention:

The ASTRA cabinet light is designed to work on constant voltage 12V DC LED drivers. Please do not connect to traditional power supplies such as magnetic / electronic AC transformers used for halogen lighting products.


All electrical work must be carried out by a licenced electrician (Please wire in parallel).

Please select the appropriate LED driver to suit the total amount of fixtures on a circuit. Please use the table below for selection. Domus Lighting offers higher wattage LED drivers to suit larger applications. Please contact our head office for advice or your local place of purchase.

1. Recessed Mounting

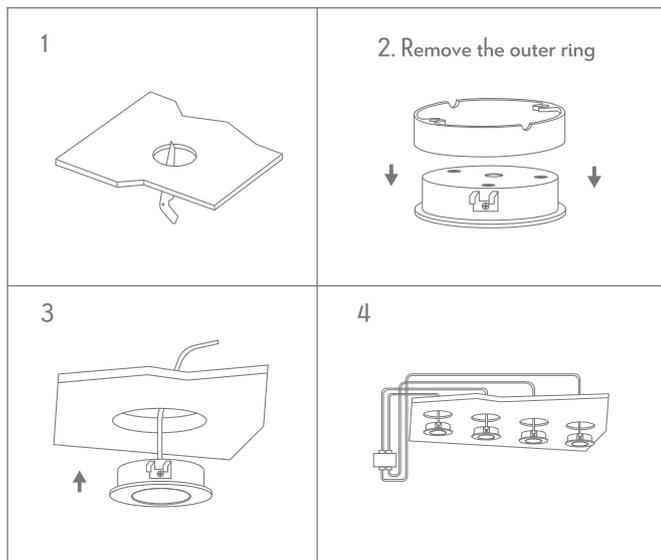

2. Surface Mounted

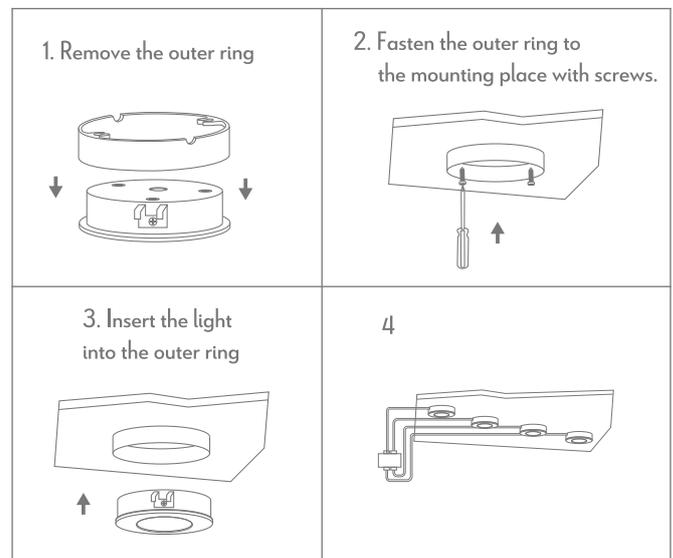

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas