



MASTER PL-C 4 Pin

MASTER PL-C 26W/830/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Nominal lifetime	10,000 h			
Cap-Base	G24Q-3 [G24q-3]			
Light Technical				
Color Code	830 [CCT of 3000K]			
Luminous Flux	1,800 lumen			
Color Designation	Warm White (WW)			
Correlated Color Temperature (Nom)	3000 K			
Luminous Efficacy (rated) (Nom)	67 lm/W			
Color rendering index (CRI)	82			
Operating and Electrical				
Power Consumption	26.0 W			
Lamp Current (Nom)	0.335 A			


Controls and Dimming				
Dimmable	Yes			
Approval and Application				
Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	29 kWh			
Product Data				
Full product code	871150062335500			
Order product name	MASTER PL-C 26W/830/4P 1CT/5X10BOX			
EAN/UPC - Product	8711500623355			
Order code	927907383001			
Local order code	PLC26W8304P			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	50			
Material number (12NC)	927907383001			
Full product name	MASTER PL-C 26W/830/4P 1CT/5X10BOX			

Datasheet, 2023, April 15 data subject to change

MASTER PL-C 4 Pin


EAN/UPC - Case	8711500716040
Local code description	PLC26W8304P

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 26W/830/4P 1CT/	27.1 mm	27.1 mm	130.5 mm	149.0 mm	163.9 mm
5X10BOX					


Photometric data

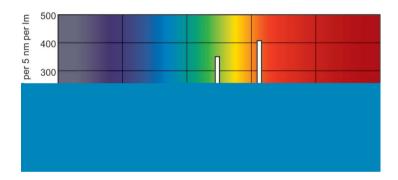

Spectral Power Distribution Colour - MASTER PL-C 26W/830/4P 1CT/5X10BOX

Lifetime

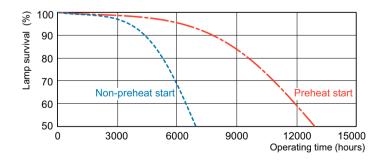



Life Expectancy Diagram - MASTER PL-C 26W/830/4P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-C 26W/830/4P 1CT/5X10BOX

MASTER PL-C 4 Pin

Lifetime



Lumen Maintenance Diagram - MASTER PL-C 26W/830/4P 1CT/5X10BOX



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.