

## DECO-13-SQR-TRIO

### Fixed LED Downlight



#### Description

The DECO range of LED downlights have been designed with a deep-set frame to reduce glare from the light source. Featuring a wide light distribution, and with an ultra slim housing, allows for this downlight to be suitable for installations where ceiling space is minimal. Complete with a dimmable LED driver and flex and plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.



#### Specification Features


Input Voltage:	240V AC
Power (W):	13W
IP rating (IP):	44*
Lumens (lm):	Warm White 3000K - 1186lm Neutral White 4000K - 1306lm White 5700K - 1237lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥83
Beam angle (°):	90°
Dimmable:	Yes**
Lifespan (hrs):	50,000hrs
Cutout (Ø):	Ø90mm

\* IP44 rating is from the underside of the down light once installed into the ceiling.

\*\* Fully dimmable with suitable dimmers.



#### Diagrams / Additional

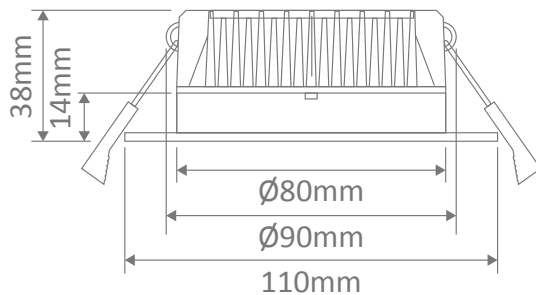

**Cutout: Ø90mm**

Item No.	Variant			CCT
	Wht	Blk	Alu	
DECO-13-SQR	20425	20528	20427	TRIO
	21591	21592	21593	