NEWPORT Series Installation Guide

Thanks for choosing our Newport DC Series ceiling fan.

We strongly recommend that you read this manual carefully before installation.



MNF143WWR 1420mm 3 Blade Ceiling Fan White Satin with Remote Control MNF143MMR 1420mm 3 Blade Ceiling Fan Matt Black with Remote Control

MNF143OWR 1420mm 3 Blade Ceiling Fan Old Bronze/Walnut with Remote Control MNF143WOR 1420MM 3 Blade Ceiling Fan White Satin/Oak with Remote Control

Models Parameters (Fan and Light):-


MNF1433WWR 1420mm 3 Blade Ceiling Fan White Satin, 15W Tricolour LED Light with Remote Control
1420mm 3 Blade Ceiling Fan Matt Black, 15W Tricolour LED Light with Remote Control
1420mm 3 Blade Ceiling Fan Old Bronze/Walnut, 15W Tricolour LED Light with Remote Control
1420mm 3 Blade Ceiling Fan White Satin/Oak, 15W Tricolour LED Light with Remote Control
1420mm 3 Blade Ceiling Fan White Satin/Oak, 15W Tricolour LED Light with Remote Control

Part List:


Qty 1x motor assembly Qty 1x instruction manual Qty 1x screw kit Qty 1x balancing kit

Qty 1x hanging bracket Qty 1x remote control kit Qty 3x blades

Application

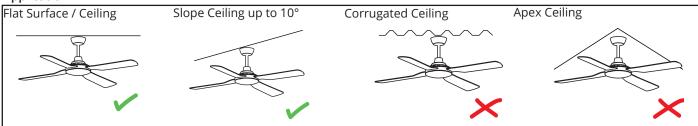

How to Assemble



Secure the hanger bracket to ceiling beam or a suitable piece of timber inserted between the ceiling beams using the two long screws supplied with the package.

Fg.2



Place circular shockproof gasket above the hanger bracket. Align the bracket and screw the hanger bracket to the ceiling tightly. Fg.3

Place fan into hanger bracket and align Ball Joint Slot with hanger bracket as illustrated. Fg.4



Warranty


After wiring is completed, attach the canopy to the hanger bracket by pushing upwards and twisting anticlockwise. Tighten screws and ensure canopy is not touching the ball joint.



WARNING Installation MUST carry out by a qualified and licensed electrician.


How to Install Blades





To install align the blades with the orifice as shown.


Fg.6



Attach the blade to the top of the motor using the 4 blade screws provided. Tighten the screws and repeat this procedure for all blades.

How to Install / Remove the Plastic Shade

Tow to install / Remove the Plastic Shade

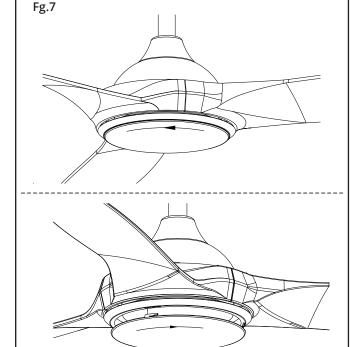


To remove - turn the plastic shade anti-clockwise.

To install - The plastic shade buckle is pushed up to the long hole on the light plate, spin the plastic shade clockwise.

CCT (Colour Changeable Temperature)

Fg.8



Choose colour temperature by licking the switch in the LED

C = 5000K cool white


N = 4000K neutral white

W = 3000K warm white




WARNING Installation MUST carry out by a qualified and licensed electrician.

Instructions and Functions of Transmitter




- 1. LED indicator light
- 2. Speed of the fan (1 high speed - 5 low speed)
- 3. Timing control of the fan
- 4. Direction of the fan (reverse switch)
- 5. Fan ON/OFF
- 6. 12v battery to be used in transmitter

Fan LED Light Model



- 1. LED indicator light
- 2. Light ON/OFF (Use to dim light within 1s)
- 3. Speed of the fan (1 high speed 5 low speed)
- 4. Timing control of the fan
- 5. Direction of the fan (reverse switch)
- 6. Fan ON/OFF
- 7. 12v battery to be used in transmitter

Installing Receiver Remote Control

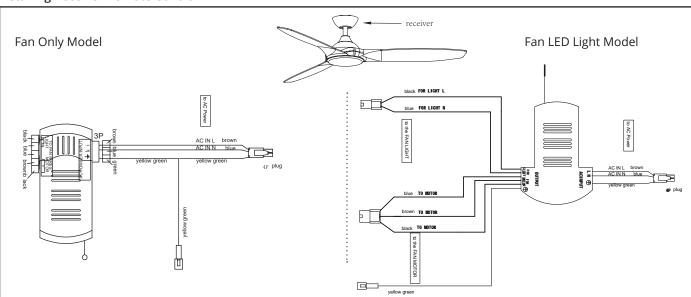


Important Reminders

- Receiver must be correctly installed in the mounting bracket
- When the transmitter cannot control the receiver, please check
 - i) has sufficient battery in the transmitter
 - ii) any existence of similar remote controlled products nearby that cause interference
- Replace battery if getting low as this will affect sensitivity of the transmitter
- Take the battery out from the transmitter when leaving used for a long time to avoid battery leaks
- Support up to 200W lighting power
- Isolation switch MUST be connected in the line
- Dimming switch on the light models is operated by tuning the light ON/OFF button within 1s. Light output will dim in stages from 18W to 8W to 2W approximately



Wire Connections

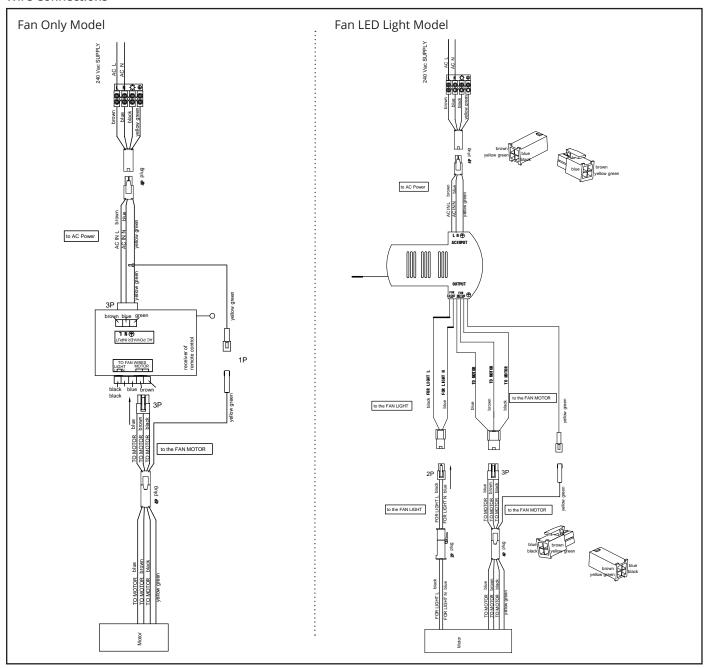

6* Year Warranty

Visit our website for details https://www.martecaustralia.com.au/warranty-statement/



WARNING

- $\bullet \quad \text{Installation of fans \textbf{MUST} follow SAA standards and meet local authority regulations.}$
- Installation MUST be carried out by a qualified and licensed electrician.
- Fan and light MUST be earthed.
- Bracket **MUST** be firmly attached to a flat solid structure or timber frame.
- DO NOT mix blades from one model to another, all blades MUST be replaced if damaged.
- The warranty is **VOID** if product is not installed according to this installation guide.

